

ES0708EP

This model is electrically driven and has a robust and mobile structure. The electric scissor lift system saves energy, ensuring zero emissions and a silent-running. It is ideal for indoor usages.



STANDARD EQUIPMENTS:

- Automatic pothole protection system
- Crushing protection
- High ground clearance
- Self-locking door on the platform
- Speed limit at maximum height
- Automatic braking system
- Emergency brake release
- Non-marking tyres
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Horn
- Cylinder locking valve
- Emergency stop button
- Emergency lowering
- Traction engine protection
- Anchoring eyebolts
- Onboard diagnostics system
- Hour counter
- Proportional controls
- Power to platform
- Maintenance free battery

MAIN APPLICATIONS



Maintenance



Plant Service



Construction



Storage/
Warehouse



Cleaning






Painting/
Restoration

ES0708EP

Load capacity	230 kg
Load capacity when extended	113 kg
Max no. Occupants (Indoor/outdoor)	2/0
A Working height	7.6 m
B Platform floor level height	5.6 m
C Overall length	1.52 m
D Overall width	0.81 m
E Overall height (rails up)	2.12 m
Transport height (rails down)	1.76 m
F Platform dimensions (length/width)	1.37x0.7 m
G Platform extension	0.6 m
Ground clearance (stowed)	6 cm
Ground clearance (raised)	1.5 cm
Wheelbase	1.13 m
Turning radius (inside)	45 cm
Turning radius (outside)	1.60 m
Driving motors	24 V/0.5 kW
Lifting motors	24 V/2.2 kW
Travel speed (stowed)	4 km/h
Travel speed (raised)	0.6 km/h
Batteries	2x12 V/115 Ah AGM batteries maintenance free
Integrated battery charger	24V/10A
Gradeability	25%
Maximum working slope	1.5°/3°
Non-marking tyres	230x100 mm
Weight (CE)	1,260 kg

STANDARDS COMPLIANCE:
EN 280, ANSI/SAIA A92.20

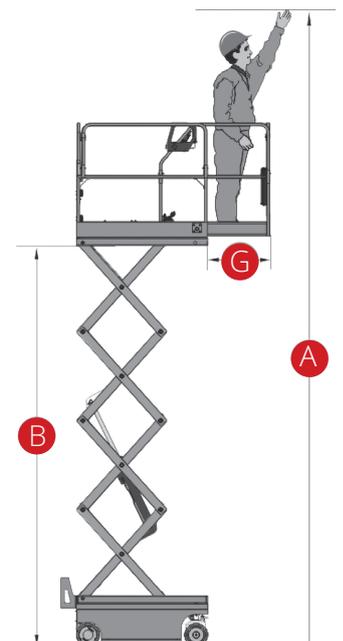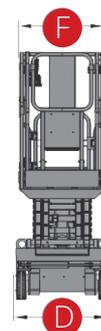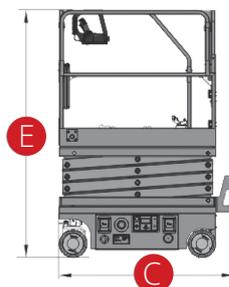

Non-marking solid tyres



Safety bracket